

Pass4sureQuiz



- ✓ Online Tool, Convenient, easy to study.
- ✓ Instant Online Access
- ✓ Supports All Web Browsers
- ✓ Practice Online Anytime
- ✓ Test History and Performance Review
- ✓ Supports Windows / Mac / Android / iOS, etc.



- ✓ Installable Software Application
- ✓ Simulates Real Exam Environment
- ✓ Builds Exam Confidence
- ✓ Supports MS Operating System
- ✓ Two Modes For Practice
- ✓ Practice Offline Anytime



- ✓ Printable PDF Format
- ✓ Prepared by IT Experts
- ✓ Instant Access to Download
- ✓ Study Anywhere. Anytime
- ✓ 365 Days Free Updates
- ✓ Free PDF Demo Available



Security & Privacy

We respect customer privacy. We use McAfee's security service to provide you with utmost security for your personal information & peace of mind.



365 Days Free Updates

Free update is available within 365 days after your purchase. After 365 days, you will get 50% discounts for updating.



Money Back Guarantee

Full refund if you fail the corresponding exam in 90 days after purchasing. And Free get any another product.



Instant Download

After Payment, our system will send you the products you purchase in mailbox in a minute after payment. If not received within 2 hours, please contact us.

<http://www.pass4surequiz.com/>

The best Pass-Sure Quiz materials help you pass exam fast and easily.

Exam : **NS0-171**

Title : FlexPod Implementation and Administration

Vendor : Network Appliance

Version : DEMO

NO.1 An administrator has a FlexPod solution for use with a VMware vSphere 6.0 environment. The virtual environment consists of virtual machines running both Windows Server 2012 R2 and Windows Server 2008.


The administrator determines that the Windows Server 2008 virtual machine VMDKs are misaligned. The problem needs to be solved without incurring downtime on the virtual machines.

Which tool enables the administrator to solve the problem without virtual machine downtime?

- A. VMware vRealize Operations
- B. NetApp mbralign toolkit
- C. NetApp Virtual Storage Console
- D. UCS Central

Answer: D

NO.2 Click the Exhibit button.

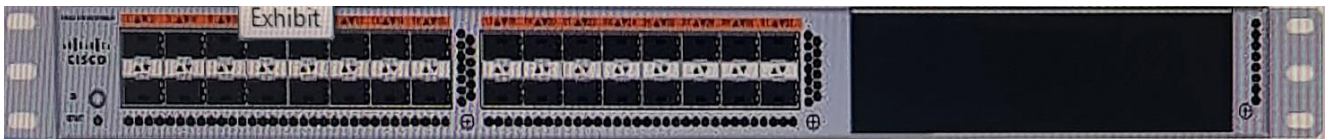

Which Cisco switch is shown in the exhibit?

- A. Nexus 2232
- B. Nexus 5548
- C. Nexus 5596
- D. Nexus 7004

Answer: B

NO.3 Your company is looking for a small remote office infrastructure to deploy to your 30 remote sites. You are asked to write deployment procedures for each site. Your goal is to have each site deployed in less than a day.

Which tool will help you accomplish your goal?

- A. OnCommand System Manager
- B. OnCommand Insight
- C. UCS Director
- D. UCS Manager

Answer: C

NO.4 An administrator is deploying a FlexPod solution for use with VMware vSphere 6.0.

The storage environment consists of a two-node AFF8040 cluster running clustered Data ONTAP 8.3 with a single DS2246 disk shelf fully populated with 800 GB SSD drives.

The system is configured to use Advanced Drive Partitioning (ADP).

The administrator wants to ensure that each node is configured with the same amount of resources while also using hot spares for resiliency.

In this scenario, how many total disk partitions will each node have available for the data aggregate?

- A. 12
- B. 8
- C. 11
- D. 22

Answer: B

NO.5 Click the Exhibit button.

Name: Exhibit Template_A

Description:

Fabric ID: Fabric A Fabric B Enable Failover

Target

Adapter
 VM

Warning
If VM is selected, a port profile by the same name will be created.
If a port profile of the same name exists, and updating template is selected, it will be overwritten

Template Type: Initial Template Updating Template

VLANs

Filter Export Print

Select	Name	Native VLAN
<input type="checkbox"/>	default	<input type="radio"/>
<input type="checkbox"/>	IB-Mgmt	<input type="radio"/>
<input type="checkbox"/>	INFRA-NFS	<input type="radio"/>
<input type="checkbox"/>	Native-VLAN	<input type="radio"/>
<input type="checkbox"/>	VM-Traffic	<input type="radio"/>
<input checked="" type="checkbox"/>	SCSI-A-VLAN	<input type="radio"/>

Create VLAN

MTU: 9000

MAC Pool: MAC_Pool_A(28/32)

QoS Policy: <not set>

Network Control Policy: Enable_CDP

An iSCSI SAN boot is not working for a new Cisco UCS service profile. The new vNIC template was created using the settings shown in the exhibit. What should you do to make iSCSI SAN boot work?

- A. Specify a QoS policy.
- B. Change the MAC pool to "<not set>".
- C. Set the iSCSI-A-VLAN as the "Native VLAN".
- D. Change the vNIC template to type "Initial Template".

Answer: A

NO.6 You are creating the Gold Master Boot LUN for Windows 2012 R2 Hyper-V hosts. In this scenario, which three steps are needed to ensure that all Hyper-V hosts will work as desired? (Choose three.)

- A.** Disassociate the service profile before cloning the LUN.
- B.** Map all Hyper-V hosts to the same Gold Master Boot LUN for consistency.
- C.** Use Sysprep to prepare the operating system for duplication.
- D.** Use a temporary service profile to install and configure the OS.
- E.** Enter in the Windows license key to activate Windows before cloning the LUN.

Answer: B,D,E